



LARGE SNOOT

GK-RDLR-22

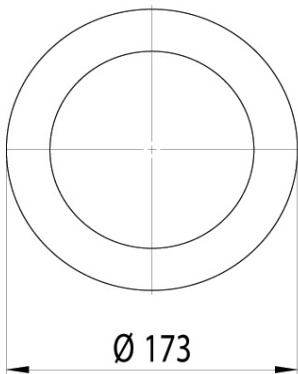

Luminous Flux (lm):	1550
Colour Temperature/s (K):	3000
Power Consumption (W):	22
Voltage (V):	240
DC Drive Current (I):	350
Beam Angle (°):	70°
Colour/Finish:	Matt White
Applications:	Lobbys, Commercial Buildings, Offices
Features:	Deep set low glare, diffused, high output, low energy consumption, maintenance free
Lamp Type:	COB High output Bridgelux
Lifespan (hrs):	35,000
Fixture Size:	Ø 173 x 146mm Deep
CRI:	82
IP Rating:	23
Mounting:	Recessed with Ø 160mm Cut Out

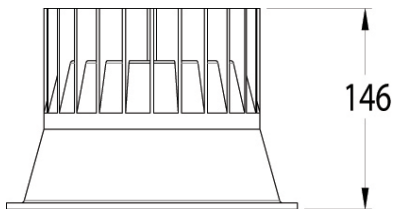

Phone +61 2 9098 8999
Email info@thelightingguild.org
Visit www.thelightingguild.org
PO Box 6209 West Gosford NSW 2250 Australia