




# 17W DECORATIVE CEILING LIGHT



## LG-DCL-1730

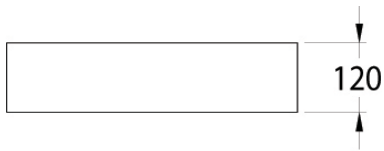

MOUNTING PLATE DETAIL



Luminous Flux (lm):	2070
Colour Temperature/s (K):	3000
Power Consumption (W):	17
Voltage (V):	240
Current (I):	350mA
Beam Angle (°):	Diffused
Colour/Finish:	Fabric outer shade with frosted inner diffuser
Applications:	Aged care, residential
Features:	High efficiency with 135lm/watt, softlight, optional integrated emergency function
Lamp Type:	Tridonic Stark CLE
Lifespan (hrs):	50,000
Fixture Size:	Ø 420 x 120mm High
CRI:	83
IP Rating:	20
Mounting:	Surface

 **the lighting guild™**

Phone +61 2 9098 8999  
Email [info@thelightingguild.org](mailto:info@thelightingguild.org)  
Visit [www.thelightingguild.org](http://www.thelightingguild.org)  
PO Box 6209 West Gosford NSW 2250 Australia