
HIDDEN 35



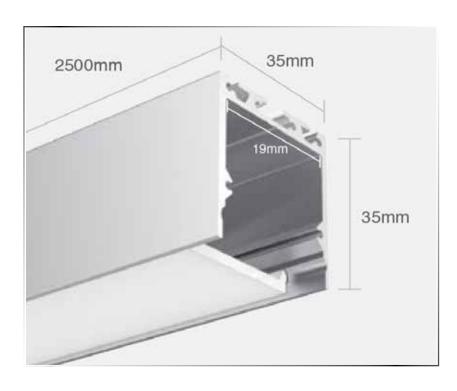

Colour Temperature/s (K): 2700 / 3000K Power Consumption (W): 28w p/mtr

Voltage (V): 24 Current (I): n/a Beam Angle (°): 170

Luminous Flux (Im):

Colour/Finish: Silver anodised with opal matt diffuser

Applications: Pelmets, coves, wall washing

Features: Discreet minimal linear LED, extremely low

1900 / 2100 lm p/mtr

maintenance, energy efficient. Drivers ordered separately and available in 01-10V dimmable or

non-dimmable.

Lamp Type: 2835 SMD LED

Lifespan (hrs): 35,000


Fixture Size: 35 x 35 mm

CRI: < 92

IP44 (IP65 available on request) IP Rating:

Mounting: Surface mounting clips + 3M VHB double sided

tape





Phone +61 2 9098 8999

Email info@thelightingguild.org Visit www.thelightingguild.org PO Box 6209 West Gosford NSW 2250 Australia