


# HIDDEN CORNER 30



<b>Luminous Flux (lm):</b>	1900 / 2100 lm p/mtr
<b>Colour Temperature/s (K):</b>	2700 / 3000K
<b>Power Consumption (W):</b>	28w p/mtr
<b>Voltage (V):</b>	24
<b>Current (I):</b>	n/a
<b>Beam Angle (°):</b>	170
<b>Colour/Finish:</b>	Silver anodised with opal matt diffuser
<b>Applications:</b>	Pelmets, coves, wall washing
<b>Features:</b>	Discreet minimal linear LED, extremely low maintenance, energy efficient. Drivers ordered separately and available in 01-10V dimmable or non-dimmable.
<b>Lamp Type:</b>	2835 SMD LED
<b>Lifespan (hrs):</b>	35000
<b>Fixture Size:</b>	30 x 30 mm
<b>CRI:</b>	< 92
<b>IP Rating:</b>	IP44 (IP65 available on request)
<b>Mounting:</b>	Surface mounting clips + 3M VHB double sided tape

COLOUR TEMP. (K)	2700	3000
28W RIBBON	CO-HC-2827	CO-HC-2830

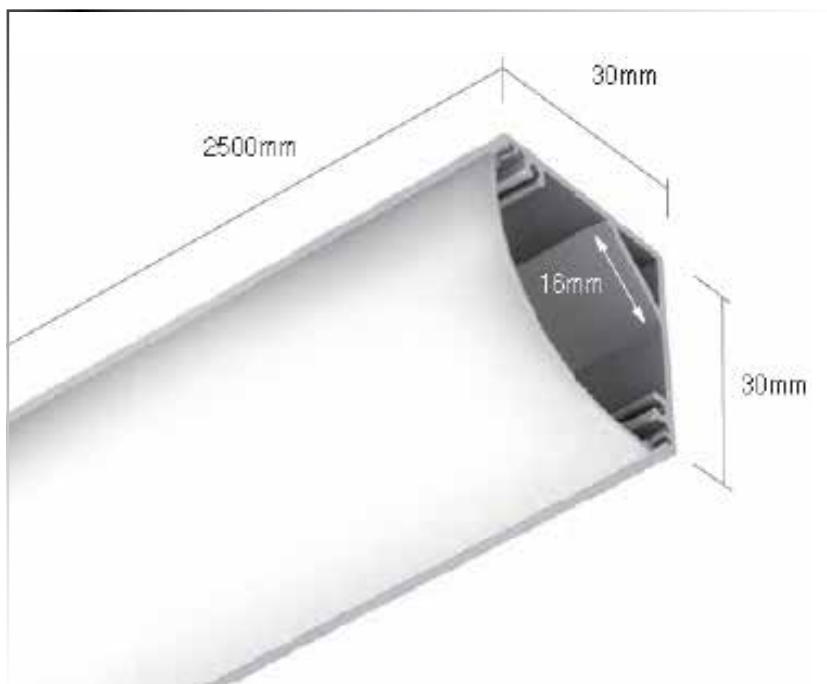

Phone +61 2 9098 8999  
 Email [info@thelightingguild.org](mailto:info@thelightingguild.org)  
 Visit [www.thelightingguild.org](http://www.thelightingguild.org)  
 PO Box 6209 West Gosford NSW 2250 Australia