

HIDDEN TRIMLESS





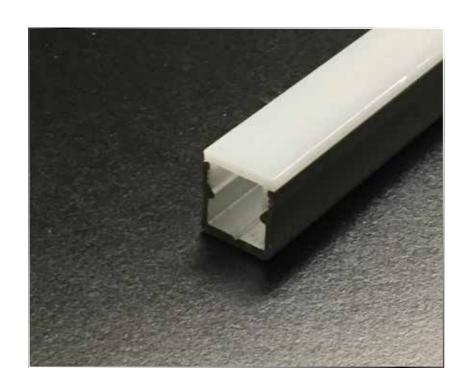

COLOUR TEMP. (K)	2700	3000
5W RIBBON	LX-HD-0527	LX-HD-0530
10W RIBBON	LX-HD-1027	LX-HD-1030
19W RIBBON	LX-HD-1927	LX-HD-1930

the lighting guild

Phone +61 2 9098 8999

Email info@thelightingguild.org

Visit www.thelightingguild.org PO Box 6209 West Gosford NSW 2250 Australia

Luminous Flux (Im): 360 / 720 / 1440 lm p/mtr

Colour Temperature/s (K): 2700 / 3000 Power Consumption (W): 5/10/19 12 / 12 / 24 Voltage (V):

Current (I): N/A Beam Angle (°): 170

Colour/Finish: Silver anodised with satin ice diffuser

Applications: Joinery, vanities, under bench lighting

Features: Flush and trimless linear led profile, extremely low maintenance, energy efficient. Drivers

ordered separately and available in 01-10V

dimmable or non-dimmable.

Lamp Type: LED Ribbon Lifespan (hrs): 35,000+

Fixture Size: 14 x 16.3mm Deep

CRI: < 90

IP Rating: 44 (IP65 available on request)

Mounting: Surface + recessed 3M VHB double sided tape

+ screw fix