
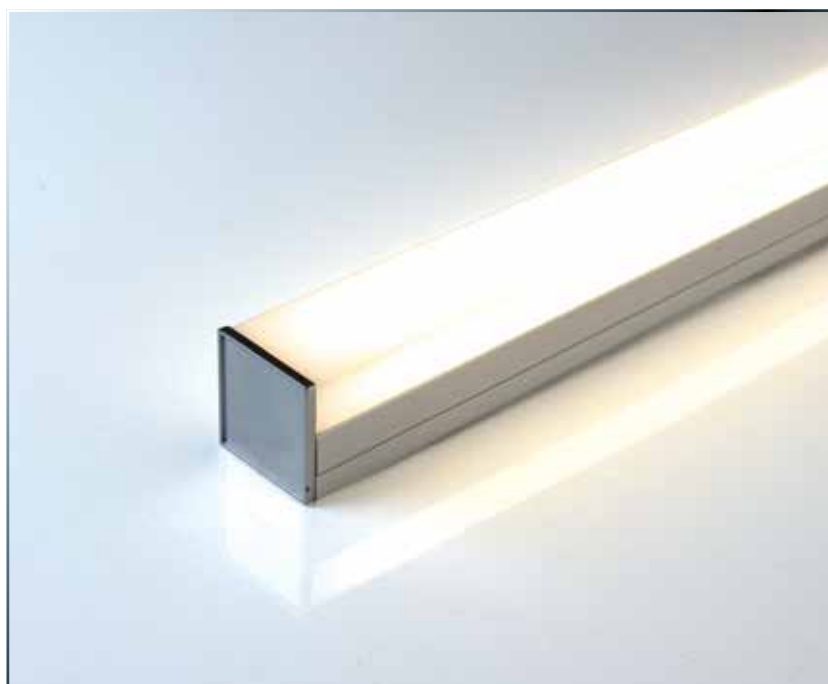


# HIDDEN SQUARE 19

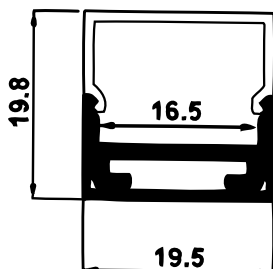

COLOUR TEMP. (K)	2700	3000
5W RIBBON	LS-HS19-0527	LS-HS19-0530
10W RIBBON	LS-HS19-1027	LS-HS19-1030
19W RIBBON	LS-HS19-1927	LS-HS19-1930

<b>Luminous Flux (lm):</b>	360 / 720 / 1440 lms p/mtr
<b>Colour Temperature/s (K):</b>	2700 / 3000
<b>Power Consumption (W):</b>	5 / 10 / 19
<b>Voltage (V):</b>	12 / 12 / 24
<b>Current (I):</b>	N/A
<b>Beam Angle (°):</b>	200
<b>Colour/Finish:</b>	Clear anodised aluminium with opal diffuser
<b>Applications:</b>	Vanities, joinery, task lighting
<b>Features:</b>	Soft general lighting, low glare diffuser, small profile with high output, minimal aesthetic. Drivers ordered separately and available in 01-10V dimmable or non-dimmable.
<b>Lamp Type:</b>	3528 LED Ribbon
<b>Lifespan (hrs):</b>	35,000
<b>Fixture Size:</b>	19.5 x 19.8mm High
<b>CRI:</b>	> 90
<b>IP Rating:</b>	20 (IP65 available on request)
<b>Mounting:</b>	Suspended + surface mount with screw fixing

 **the lighting guild™**

Phone +61 2 9098 8999  
 Email [info@thelightingguild.org](mailto:info@thelightingguild.org)  
 Visit [www.thelightingguild.org](http://www.thelightingguild.org)  
 PO Box 6209 West Gosford NSW 2250 Australia