


# OUTDOOR GARDEN SPIKE



INSTALLATION NOTE:  
MUST BE WIRED IN PARALLEL

LONG	RE-S-0330-L
SHORT	RE-S-0330-S

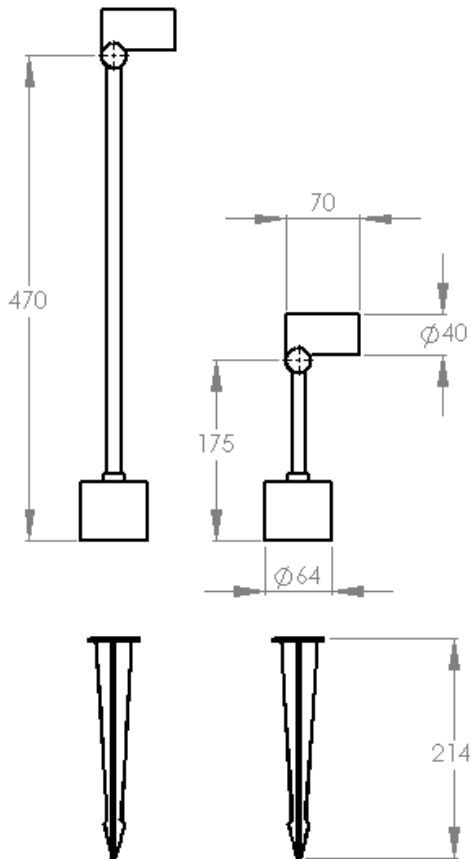

Luminous Flux (lm):	170
Colour Temperature/s (K):	3000
Power Consumption (W):	3
Voltage (V):	12 VDC
DC Drive Current (I):	n/a
Beam Angle (°):	40°
Colour/Finish:	Black
Applications:	Landscape lighting, Pathways, Stairs, Orientation Lighting, Planter Boxes
Features:	Solid aluminium construction, integrated constant voltage converter. Drivers sold separately.
Lamp Type:	Cree XPE
Lifespan (hrs):	25,000
Fixture Size:	Ø 40 x 70 x 470mm(Long) or 175mm(Short)
CRI:	80+
IP Rating:	67
Mounting:	Ground Spike

 **the lighting guild**™

Phone +61 2 9098 8999  
Email [info@thelightingguild.org](mailto:info@thelightingguild.org)  
Visit [www.thelightingguild.org](http://www.thelightingguild.org)  
PO Box 6209 West Gosford NSW 2250 Australia