



HIDDEN ASYMMETRIC

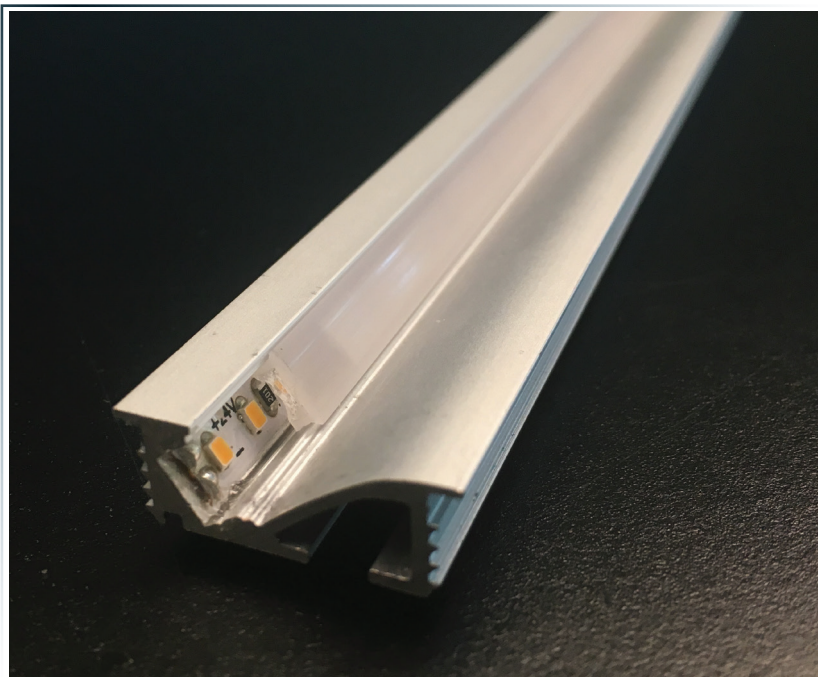

COLOUR TEMP. (K)	2700	3000
15W RIBBON	SW-HA-1527	SW-HA-1530
25W RIBBON	SW-HA-2527	SW-HA-2530

Luminous Flux (lm):	1200 / 1900 lm p/mtr
Colour Temperature/s (K):	2700 / 3000
Power Consumption (W):	15 / 25 W/mtr
Voltage (V):	24
Current (I):	N/A
Beam Angle (°):	170°
Colour/Finish:	Silver anodised with satin diffuser
Applications:	Joinery, retail display and cabinet lighting, shelves, bars, wine cellars.
Features:	Ultra slim profile, extremely low maintenance. Drivers ordered separately and available in non-dimmable, 0-10V or phase dimmable. Also available in 2100 and 2400K on request.
Lamp Type:	3014 LED Ribbon
Lifespan (hrs):	35,000
Fixture Size:	23.8 x 8.7mm Deep
CRI:	< 90
IP Rating:	44
Mounting:	Rebated: cut-out 20 x 8mm deep

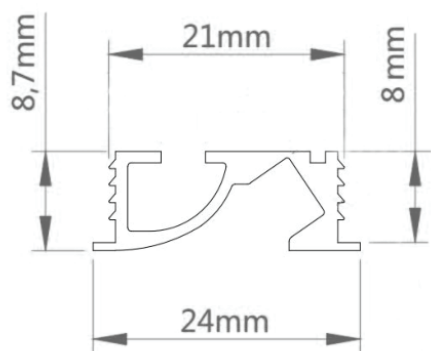

Phone +61 2 9098 8999
 Email info@thelightingguild.org
 Visit www.thelightingguild.org
 PO Box 6209 West Gosford NSW 2250 Australia