


HIDDEN CORNER 16



COLOUR TEMP. (K)	2700	3000
5W RIBBON	LE-HC16-0527	LE-HC16-0530
10W RIBBON	LE-HC16-1027	LE-HC16-1030
19W RIBBON	LE-HC16-1927	LE-HC16-1930

Luminous Flux (lm):	360 / 720 / 1440 lm p/mtr
Colour Temperature/s (K):	2700 / 3000K
Power Consumption (W):	5 / 10 / 19 w p/mtr
Voltage (V):	12 / 24 / 24 VDC
Current (I):	n/a
Beam Angle (°):	170
Colour/Finish:	Silver anodised with opal matt diffuser
Applications:	Joinery, vanities, under bench lighting, pelmets, coffers
Features:	Even light distribution, small form factor (T5 fluoro replacement). Drivers ordered separately and available in 01-10V dimmable or non-dimmable. Also available in 2100 and 2400K on request.
Lamp Type:	LED Ribbon
Lifespan (hrs):	35,000
Fixture Size:	16 x 16 mm
CRI:	> 90
IP Rating:	IP44
Mounting:	Surface mounting clips + 3M VHB double sided tape

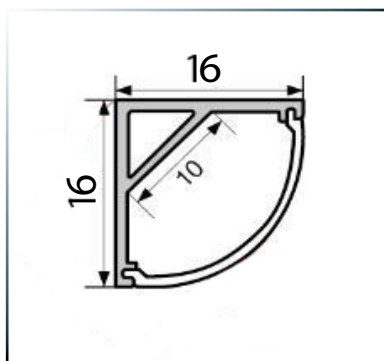

Phone +61 2 9098 8999
 Email info@thelightingguild.org
 Visit www.thelightingguild.org
 PO Box 6209 West Gosford NSW 2250 Australia