


# SNOOT 2 - ASYMMETRIC

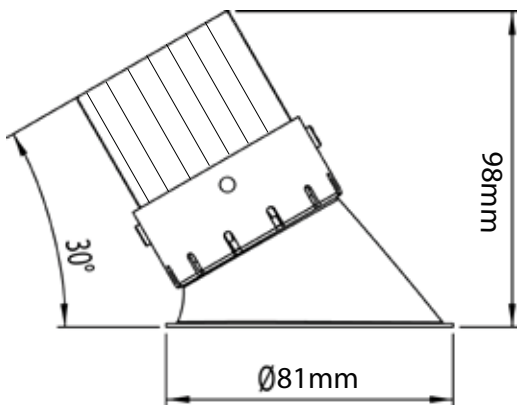

COLOUR TEMP. (K)	2700	3000	Warm to Dim
STANDARD (IP40)	SU-DLA-0927	SU-DLA-0930	AL-DLA-12WD
EXTERIOR (IP44)	SU-DLAE-0927	SU-DLAE-0930	AL-DLAE-12WD

Luminous Flux (lm):	810 / 820 / 810
Colour Temperature/s (K):	2700 / 3000 / Warm to Dim (Dims to 1800K)
Power Consumption (W):	9 / 9 / 12
Voltage (V):	240
DC Drive Current (I):	210 / 210 / 500mA
Beam Angle (°):	36 / 36 / 38°
Colour/Finish:	Matt White or Satin Black
Applications:	Accent lighting, wall washing
Features:	Low glare, minimal trim, low maintenance, includes phase dimmable driver c/w flex and plug. Diginet dimmers recommended. DALI driver available on request. Exterior model includes zinc plated / powder coated reflector and is suitable for Zone 1 wet areas.
Lamp Type:	Authentic CREE COB LED
Lifespan (hrs):	40,000
Fixture Size:	Ø 81 x 98 mm High
CRI:	> 90
IP Rating:	IP40 / IP44(Exterior)
Mounting:	Recessed with Ø 76mm Cut Out

 **the lighting guild™**

Phone +61 2 9098 8999  
 Email [info@thelightingguild.org](mailto:info@thelightingguild.org)  
 Visit [www.thelightingguild.org](http://www.thelightingguild.org)  
 PO Box 6209 West Gosford NSW 2250 Australia