
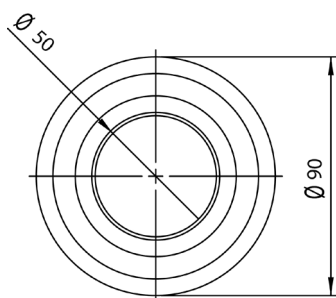


# SNOOT IN A CAN 2

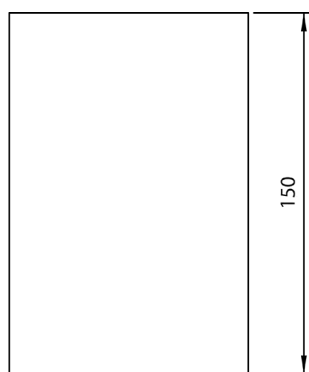

Luminous Flux (lm):	800 / 820
Colour Temperature/s (K):	2700 / 3000
Power Consumption (W):	9.3
Voltage (V):	240
Current (I):	500mA
Beam Angle (°):	35
Colour/Finish:	Matt White

**Applications:** Accent lighting, Replaces recessed downlight when depth behind ceiling is limited

**Features:** Minimal aesthetic, easy installation, low maintenance, integral ACTEC phase dimmable driver. Diginet dimmers recommended.

**Lamp Type:** Bridgelux COB LED

**Lifespan (hrs):** 35,000

**Fixture Size:** Ø 90 x 150mm High

**CRI:** 90+

**IP Rating:** 44

**Mounting:** Surface

**Accessories:** N/A

COLOUR TEMP. (K)	2700	3000
STANDARD (IP44)	NS-CC-0927	NS-CC-9030



Phone +61 2 9098 8999  
 Email [info@thelightingguild.org](mailto:info@thelightingguild.org)  
 Visit [www.thelightingguild.org](http://www.thelightingguild.org)  
 PO Box 6209 West Gosford NSW 2250 Australia