


STEALTH RECESSED

BP-SR-0230



Luminous Flux (lm):	95
Colour Temperature/s (K):	3000
Power Consumption (W):	2.8
Voltage (V):	24 VDC
Current (I):	n/a
Beam Angle (°):	70°
Colour/Finish:	Matt White Texture, Black Texture
Applications:	Internal and external walkways, hallways, stairs and orientation lighting.
Features:	Minimal aesthetic, Low glare, Easy to install, Zero maintenance
Lamp Type:	LED
Lifespan (hrs):	35,000
Fixture Size:	70 x 66 x 40mm Deep
CRI:	>80
IP Rating:	65
Mounting:	Recessed

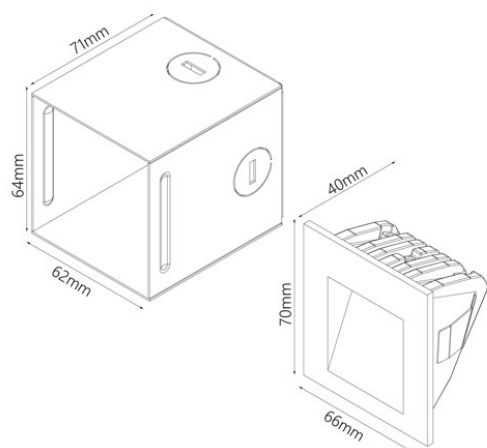

Phone +61 2 9098 8999
Email info@thelightingguild.org
Visit www.thelightingguild.org
PO Box 6209 West Gosford NSW 2250 Australia