


# TRACK LIGHT

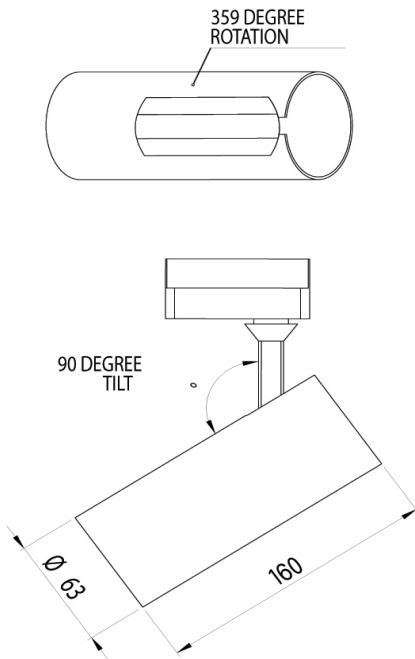

	BLACK	WHITE
STANDARD DIM	LE-TL-1527-B	LE-TL-1527-W
WARM TO DIM	LE-TLWD-12-B	LE-TLWD-12-W

<b>Luminous Flux (lm):</b>	1374 / 890 (Warm to Dim)
<b>Colour Temperature/s (K):</b>	2700 / 3000 down to 1800
<b>Power Consumption (W):</b>	15 / 12
<b>Voltage (V):</b>	240
<b>Current (I):</b>	400mA DC
<b>Beam Angle (°):</b>	15° or 38°
<b>Colour/Finish:</b>	Black or White
<b>Applications:</b>	Residential lighting, Multi Residential, Retail, Commercial
<b>Features:</b>	Integral dimmable driver, Low glare snoot, Minimal aesthetic. Rotation 350°, 110° tilt, also available in 'warm to dim'.
<b>Lamp Type:</b>	Bridgelux LED
<b>Lifespan (hrs):</b>	35,000
<b>Fixture Size:</b>	Ø 63 x 160mm
<b>CRI:</b>	90
<b>IP Rating:</b>	20
<b>Mounting:</b>	3 Circuit Track

 **the lighting guild™**

Phone +61 2 9098 8999

Email [info@thelightingguild.org](mailto:info@thelightingguild.org)

Visit [www.thelightingguild.org](http://www.thelightingguild.org)

PO Box 6209 West Gosford NSW 2250 Australia